

➡ 布水器系列

Water Distributor Series

◎ 普通组件式布水器
Normal assembled water distributor

◎ 大通量 高流速 高强度 绕丝管布水器
High-flow pvc sonic-welded screen water distributor



集散系列/Distributor for 6"-12" Vessels

阿图祖上下集散

Autotrol top and bottom distributor

H2801-B (3/4")



材质 (Material): ABS
缝隙 (Slots): 0.25mm

H2803 (3/4")



材质 (Material): ABS
缝隙 (Slots): 0.25mm

富来克上下集散

Fleck top and bottom distributor

H2805 (3/4")



材质 (Material): ABS/PVC
缝隙 (Slots): 0.25mm

H2807 (3/4")



材质 (Material): ABS/PVC
缝隙 (Slots): 0.25mm

普通上下集散

1" top and bottom distributor

H2805-1(1")



材质 (Material): ABS
缝隙 (Slots): 0.25mm
中心管 (Tube)
1": (32mm/ 33.4mm)


H2807-1(1")



材质 (Material): ABS
缝隙 (Slots): 0.25mm
中心管 (Tube)
1": (32mm/33.4mm)

香菇头及加长香菇头系列 Distributor for 6"-12" Vessels

H2809A H2809B




材质 (Material):ABS/PP
缝隙 (Slots):0.25mm
中心管 (Tube)
3/4": (26.7mm)
1": (32mm/ 33.4mm)

H2810



材质 (Material):ABS/PP
缝隙 (Slots):0.25mm
中心管 (Tube)
3/4": (26.7mm)
1": (32mm/33.4mm)

H2809AL H2809BL



材质 (Material):ABS/PP
缝隙 (Slots):0.25mm
中心管 (Tube)
3/4": (26.7mm)
1": (32mm/ 33.4mm)

H2810L



材质 (Material):ABS/PP
缝隙 (Slots):0.25mm
中心管 (Tube)
3/4": (26.7mm)
1": (32mm/33.4mm)

汉堡头系列/Top Distributor for 12“-36” Vessels

普通上布水器 中心管1¼ /1.5” (42/48.3/50mm) 缝隙Slots: 0.2/0.5/0.8mm

1¼ / 1.5" top distributor

H182A

配Fleck阀 suit for Fleck valve



H182B

配润新阀 suit for Runxin valve



H182-1

配阿图祖麦能阀 suit for Autotrol Nylon valve




富来克3150上布水器 中心管2” (60.3/63mm)

top screen for fleck 3150 valve

H182AL-1(2”)



有不锈钢螺钉 with stainless screw

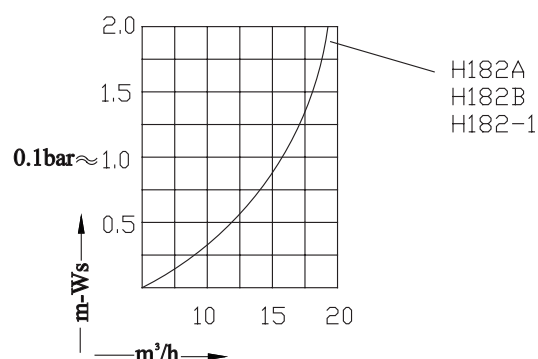

润新阀用上布水器

top screen for Runxin valve

H182BL-1

中心管1.5”(48.3/50mm)



Thread


H182BL-2

中心管2”(60/60.3mm)



Thread

有不锈钢螺钉 with stainless screw


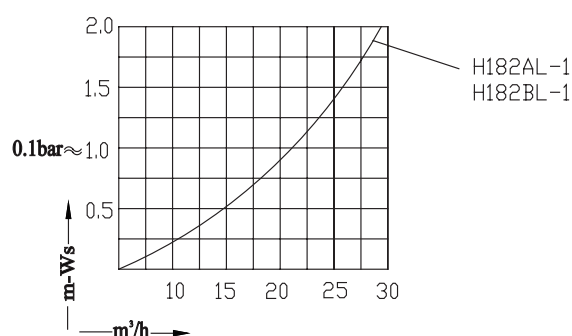


下布水器系列/Bottom Distributors

Type: H2804



材质 (Material): PP
 缝隙 (Slots): 0.2mm
 插管口 (ϕA):
 H2804: 50mm/48.3mm
 无不锈钢螺钉, 耐腐蚀
 without SS screw

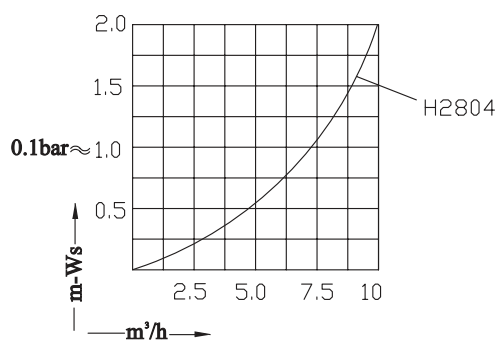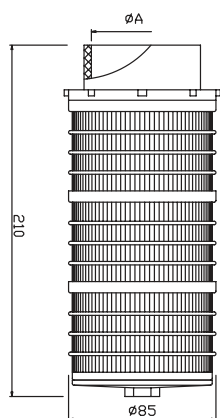

Type: H2808




材质 (Material): ABS
 缝隙 (Slots): 0.25/0.5/0.8mm
 插管口 (ϕA):
 H2808/H2808L1/H2808L2:
 50mm/48.3mm/42mm


Type: H2808L1



Type: H2808L2

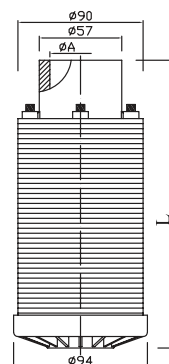



L(H2808)=200
 L(H2808L1)=260
 L(H2808L2)=440

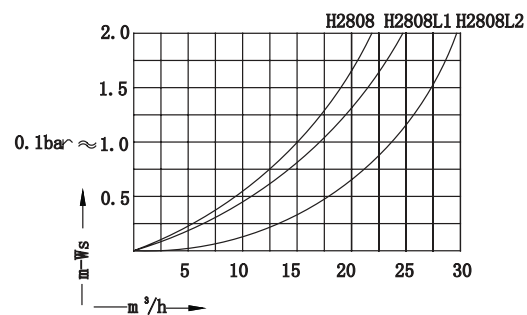

H2813N





材质 (Material) : PP
缝隙 (Slots) : 0.2/0.5mm

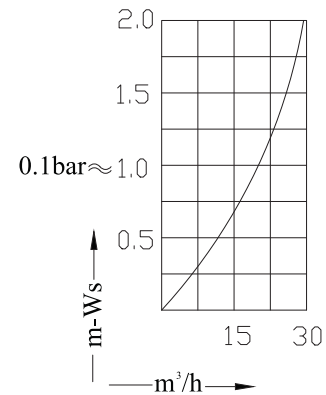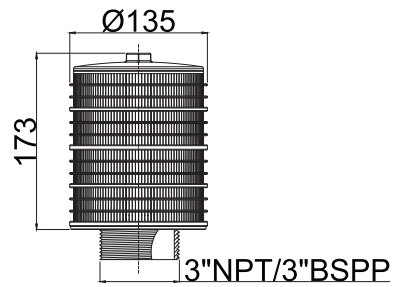

H2814N





材质 (Material) : PP
缝隙 (Slots) : 0.2/0.5mm

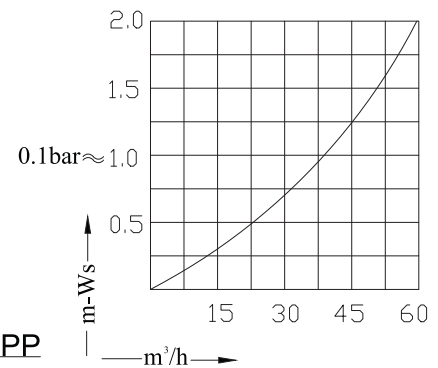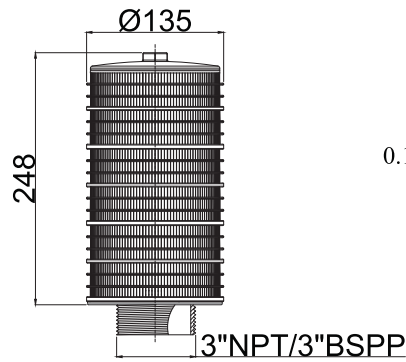

H2815N







材质 (Material) : PP
缝隙 (Slots) : 0.2/0.5mm

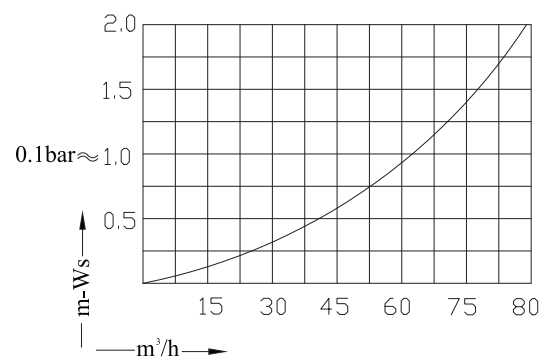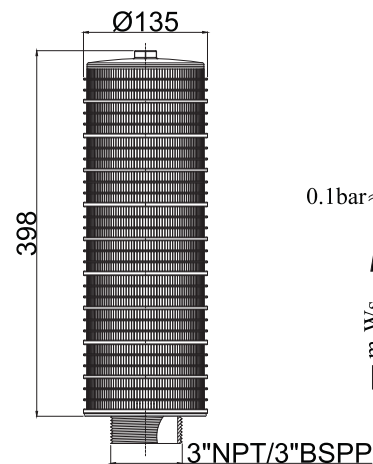

六爪顶装下布水器-A系列/Top mount distributor 6 laterals-A series

A series

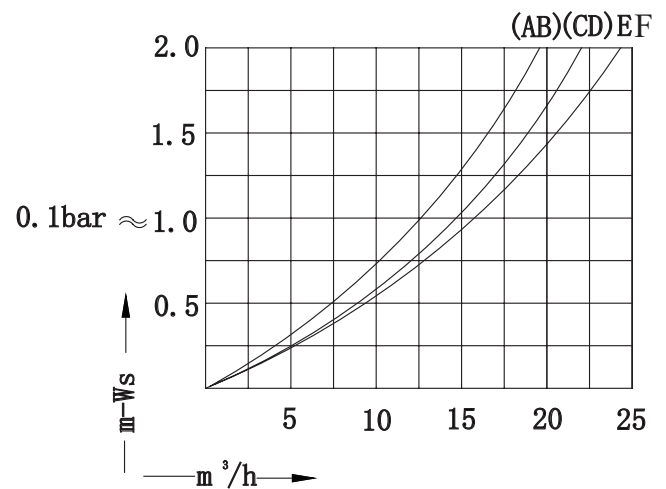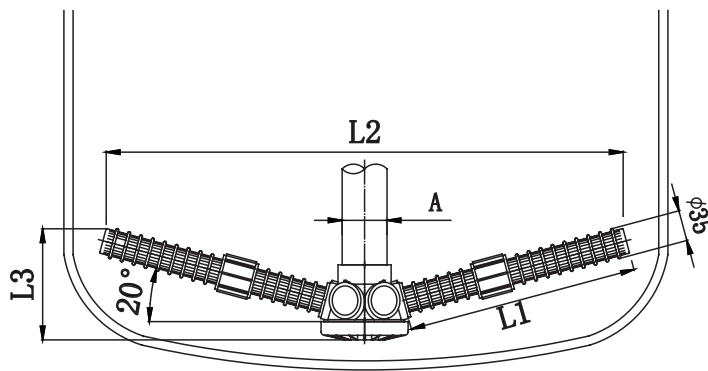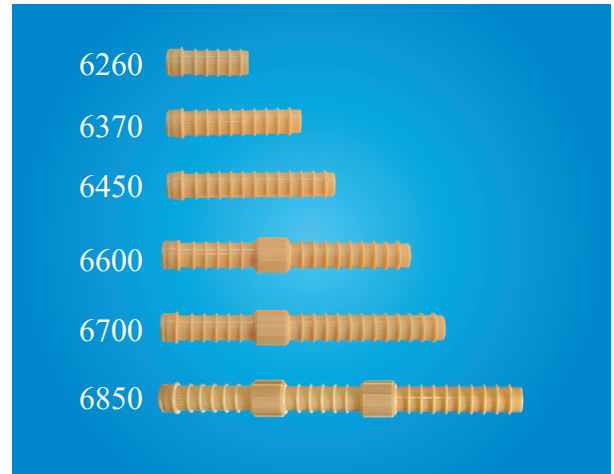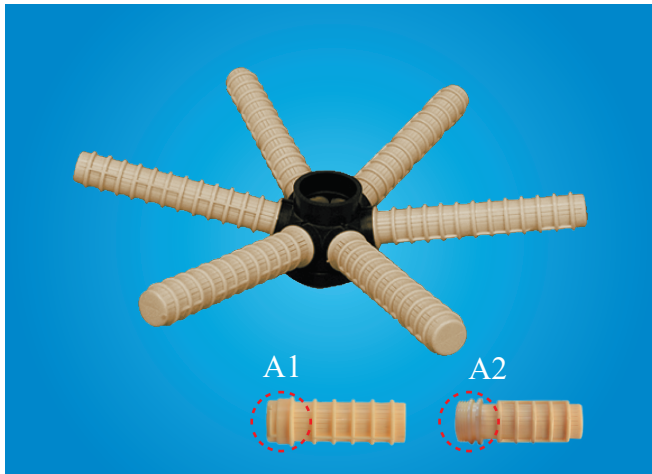




型号 Type		尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
		A	L1	L2	L3			
HU6260A1	HU6260A2	42/48.3/50	82	145	71	12-16" (300-400mm)	A	4"-8UN
HU6370A1	HU6370A2		142	365	83	18-21" (450-550mm)	B	
HU6450A1	HU6450A2		182	440	95	24" (600mm)	C	
HU6600A1	HU6600A2		266	610	105	30" (750mm)	D	
HU6700A1	HU6700A2		308	690	114	36-42" (900-1000mm)	E	
HU6850A1	HU6850A2		400	870	142	40-48" (1000-1200mm)	F	

Note:


A1系列支管采用卡口式，A2系列支管采用螺纹式。

The laterals: A1=quick lock A2=thread


B series

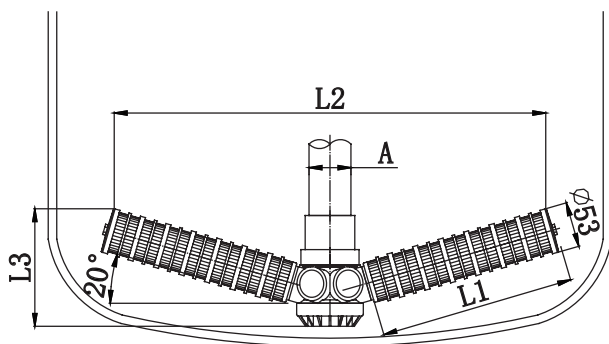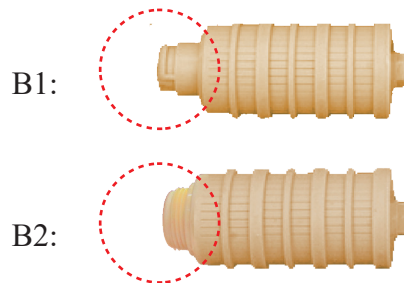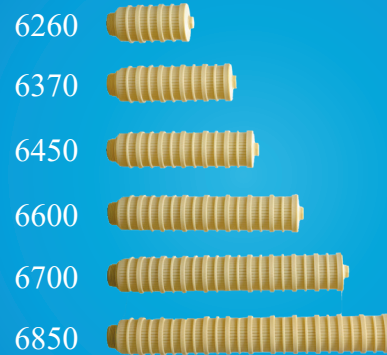

SLOT:0.2mm/0.25mm

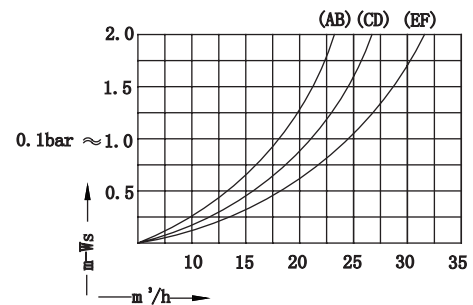

SLOT:0.4/0.5/0.8mm


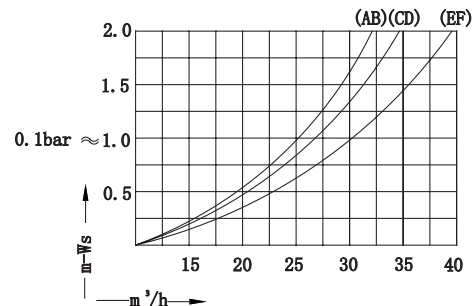


型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体上开口
		A	L1	L2	L3	Inches (mm)	Flow	Top Opening
HU6260B1	HU6260B2	1.5" (42/48.5/50)	111	296	110	12-16" (300-400mm)	A	4"-8UN
HU6370B1	HU6370B2		174	416	125	18-21" (450-550mm)	B	
HU6450B1	HU6450B2		205	455	135	24" (600mm)	C	
HU6600B1	HU6600B2	2" (60/63)	268	575	165	30" (750mm)	D	
HU6700B1	HU6700B2		331	710	175	36" (900mm)	E	
HU6850B1	HU6850B2		394	835	185	40-48" (1000-1200mm)	F	


Note:

B1系列支管采用卡口式，B2系列支管采用螺纹式。


The laterals: B1=quick lock B2=thread

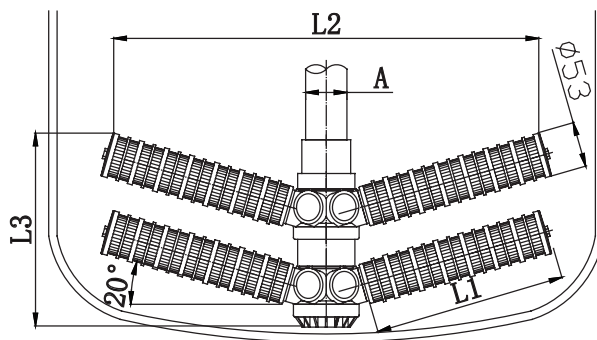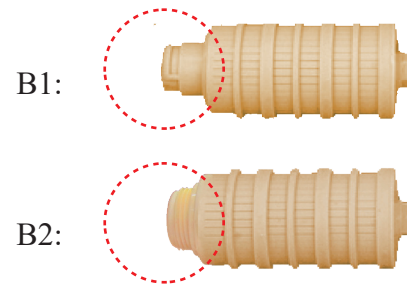

SLOT:0.2mm/0.25mm

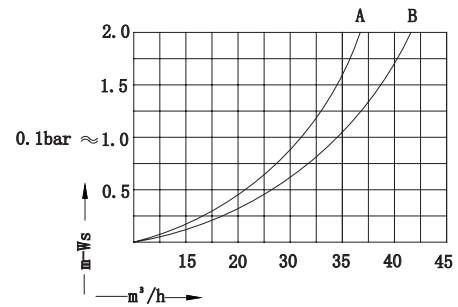

SLOT:0.4/0.5/0.8mm

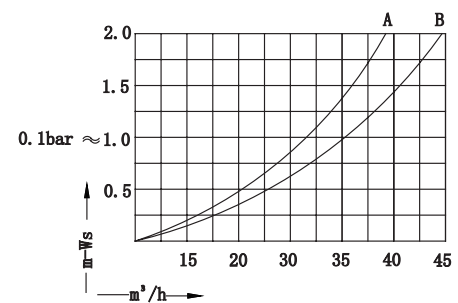

型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体上开口
	A	L1	L2	L3	Inches (mm)	Flow	Top Opening
HU6700B1-2	60.3/63	331	710	300	36"-42" (900-1000mm)	A	4"-8UN
HU6850B1-2		394	835	310	48"-63" (1200-1600mm)	B	

Note:

B1系列支管采用卡口式，B2系列支管采用螺纹式。

The laterals: B1=quick lock B2=thread

侧装布水器/Side Mount Diffuser For Top



H5671BE
(ELBOW CONNECT)



H5671BS
(STRAIGHT CONNECT)





H5671BU
(UNION CONNECT)



H5671BU-V
(UNION CONNECT)
带负压保护器 (见P33页)
with vacuum breaker (refer to P33)




4"罐体接口紧固工具
Tighten tool for 4" FRPopening

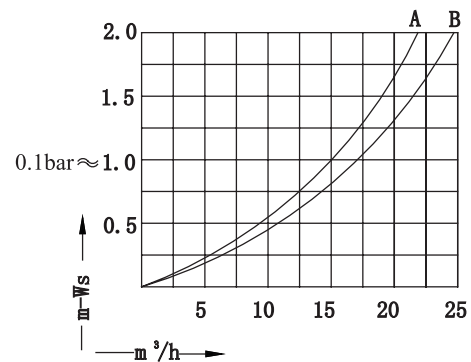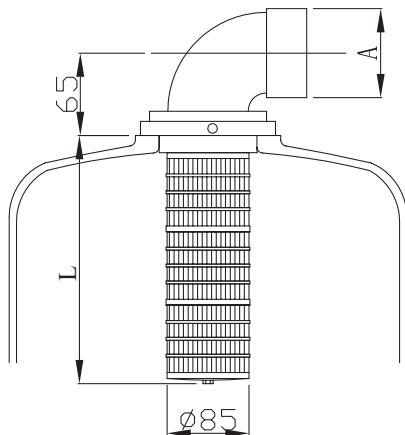

型号 Type	外管连接方式	尺寸 (mm)		罐体尺寸 Tank Size	流量	罐体上开口
	Connect method	A	L	Inches (mm)	Flow	Top Opening
H5671A/H5671B	E: Elbow S: Straight U: Union	60/63	210	12"-36" (300-900mm)	A	4"-8UN
H5671AL/H5671BL			316	36"-48" (900-1200mm)	B	

A系与B系所采用的4"罐口连接件不同
The 4" adaptor is difference between A series and B series

A:



B:



六爪侧装下布水器-A系列/Side Mount Distributor 6 Laterals -A Series



(ELBOW CONNECT)



(STRAIGHT CONNECT)




(UNION CONNECT)






4"罐体接口紧固工具
Tighten tool for 4" FRP opening

A1:

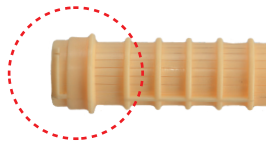

A2:

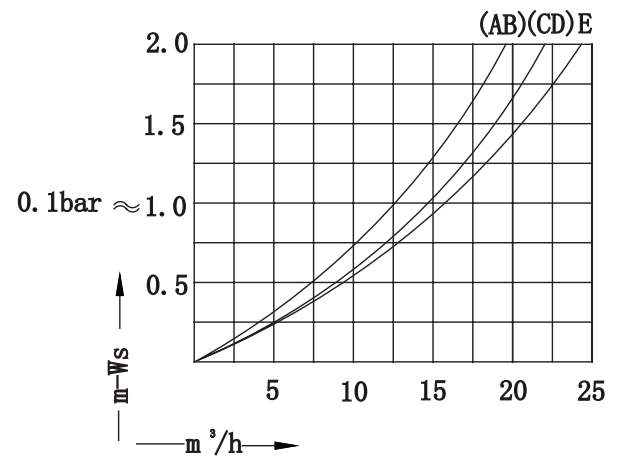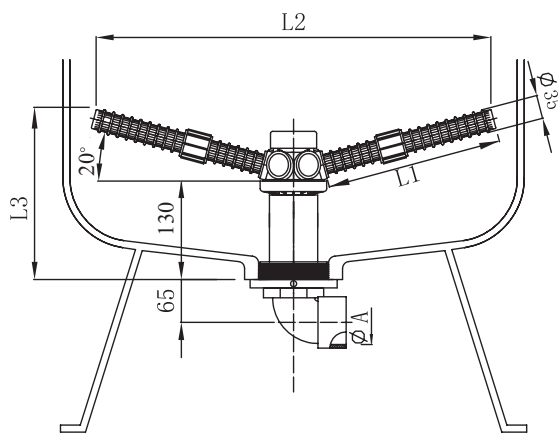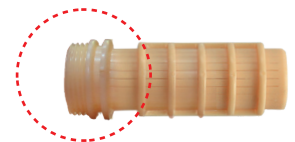

型号 Type		尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
		A	L1	L2	L3			
HD6260A1	HD6260A2	60/63	82	145	158	12-16" (300-400mm)	A	4" -8UN
HD6370A1	HD6370A2		142	365	172	18-21" (450-550mm)	B	
HD6450A1	HD6450A2		182	440	178	24" (600mm)	C	
HD6600A1	HD6600A2		266	610	198	30" (750mm)	D	
HD6700A1	HD6700A2		308	690	198	36-42" (900-1000mm)	E	
HD6850A1	HD6850A2		400	870	226	40-48" (1000-1200mm)	F	

外管连接方式可选：1、弯头 2、直接 3、活接由令 无特殊说明，默认为弯头连接

Connect Method of Outer Pipe with water distributor: 1,E: Elbow Connect. 2. S: Straight Connect. 3.U: Union Connect.

No special description, would be elbow connect


Note:

A1系列支管采用卡口式，A2系列支管采用螺纹式。

The laterals: A1=quick lock A2=thread



(ELBOW CONNECT)

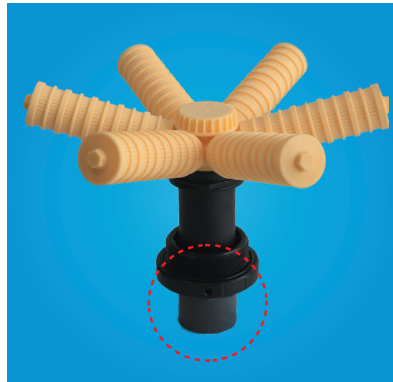


(STRAIGHT CONNECT)



(UNION CONNECT)





4"罐体接口紧固工具
Tighten tool for 4" FRP opening

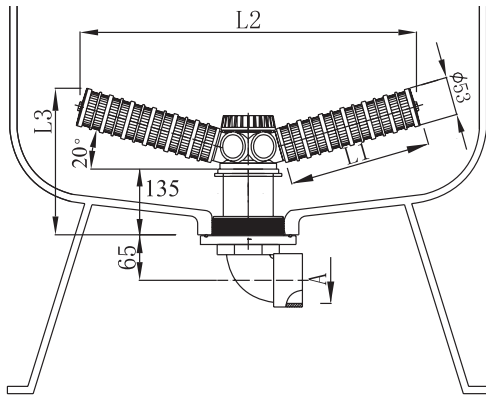

外管连接方式可选：1、弯头 2、直接 3、活接由令
无特殊说明，默认为弯头连接

Connect Method of Outer Pipe with water distributor: 1,E:
Elbow Connect. 2. S: Straight Connect. 3.U: Union Connect.
No special description, would be elbow connect

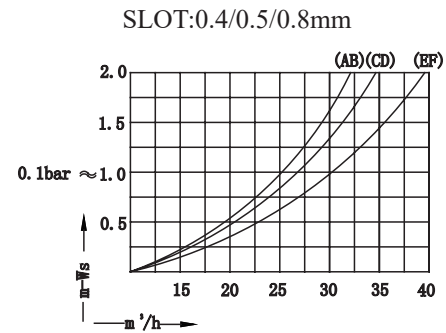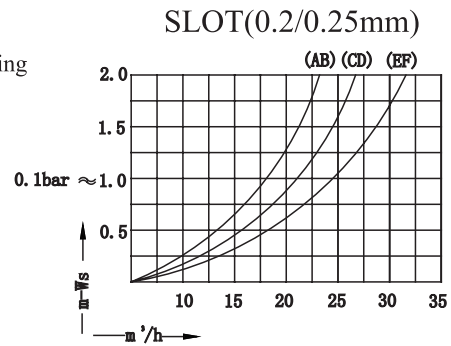

型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体下开口
		A	L1	L2	L3	Inches (mm)	Flow	Bottom Opening
HD6260B1	HD6260B2	60/63	111	296	156	12-16" (300-400mm)	A	4"-8UN
HD6370B1	HD6370B2		174	416	176	18-21" (450-550mm)	B	
HD6450B1	HD6450B2		205	455	186	24" (600mm)	C	
HD6600B1	HD6600B2		268	575	203	30" (750mm)	D	
HD6700B1	HD6700B2		331	710	223	36" (900mm)	E	
HD6850B1	HD6850B2		394	835	233	40"-48" (1000-1200mm)	F	

Note:

B1系列支管采用卡口式，B2系列支管采用螺纹式。

The laterals: B1=quick lock B2=thread



(ELBOW CONNECT)



(STRAIGHT CONNECT)




(UNION CONNECT)

型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体下开口
		A	L1	L2	L3	Inches (mm)	Flow	Bottom Opening
HD6260B1F	HD6260B2F	60/63	111	296	156	12-16" (300-400mm)	A	4"-8UN
HD6370B1F	HD6370B2F		174	416	176	18-21" (450-550mm)	B	
HD6450B1F	HD6450B2F		205	455	186	24" (600mm)	C	
HD6600B1F	HD6600B2F		268	575	203	30" (750mm)	D	
HD6700B1F	HD6700B2F		331	710	223	36" (900mm)	E	
HD6850B1F	HD6850B2F		394	835	233	40"-48" (1000-1200mm)	F	



(ELBOW CONNECT)

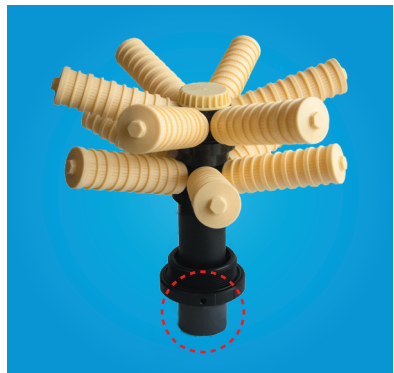

(STRAIGHT CONNECT)



(UNION CONNECT)


型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体下开口
		A	L1	L2	L3	Inches (mm)	Flow	Bottom Opening
HD6700B1-2	HD6700B2-2	60/63	331	710	348	36"-40" (900-1000mm)	A	4"-8UN
HD6850B1-2	HD6850B2-2		394	835	358	48"-63" (1200-1600mm)	B	

Note:


B1系列支管采用卡口式，B2系列支管采用螺纹式。

The laterals: B1=quick lock B2=thread

八爪/十六爪顶装下布水器/Top Mount Distributor 8/16 Laterals

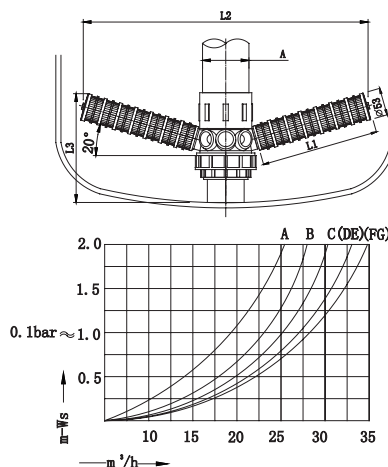


型号 Type	尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
	A	L1	L2	L3			
HU5669B2-1	60.3/63 89/90	205	490	205	24" (600mm)	A	6" FLG
HU5670B2-1		268	615	225	30" (750mm)	B	
HU5672B2-1		300	690	235	36" (900mm)	C	
HU5673B2-1		363	810	255	42" (1000mm)	D	
HU5674B2-1		426	930	275	48" (1200mm)	E	
HU5675B2-1		489	1050	295	60" (1500mm)	F	
HU5676B2-1		552	1170	305	63-80" (1600-2000mm)	G	

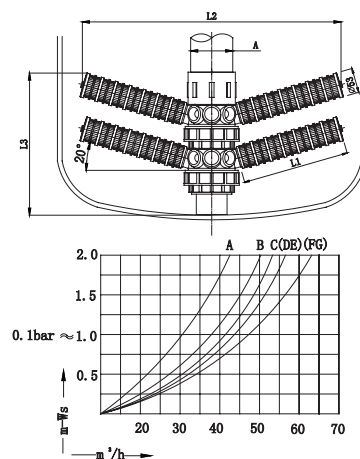


型号 Type	尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
	A	L1	L2	L3			
HU5669B2-2	89/90	205	490	342	24" (600mm)	A	6" FLG
HU5670B2-2		268	615	352	30" (750mm)	B	
HU5672B2-2		300	690	357	36" (900mm)	C	
HU5673B2-2		363	810	367	42" (1000mm)	D	
HU5674B2-2		426	930	377	48" (1200mm)	E	
HU5675B2-2		489	1050	387	60" (1500mm)	F	
HU5676B2-2		552	1170	407	63-80" (1600-2000mm)	G	

大流量八爪/十六爪顶装下布水器/High flow Top Mount Distributor 8/16 Laterals

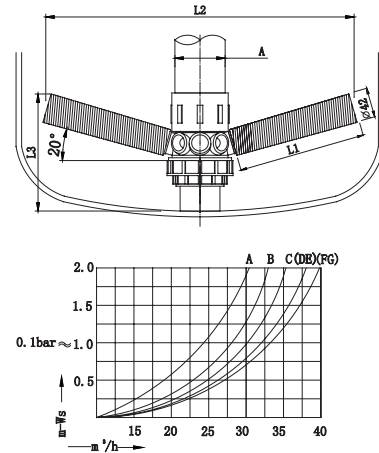

型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	绕丝管缝隙	罐体上开口
	A	L1	L2	L3	Inches (mm)	Flow	Slot (mm)	Top Opening
HU5669C-1	89/90	205	490	205	24" (600mm)	A	0.2/0.25/	6"FLG
HU5670C-1		268	615	225	30" (750mm)	B	0.3/0.35/	
HU5672C-1		300	690	235	36" (900mm)	C	0.4/0.45/	
HU5673C-1		363	810	255	42" (1000mm)	D	0.5/	
HU5674C-1		426	930	275	48" (1200mm)	E		
HU5675C-1		489	1050	295	60" (1500mm)	F	任意缝隙可选	
HU5676C-1		552	1170	305	63-80" (1600-2000mm)	G		

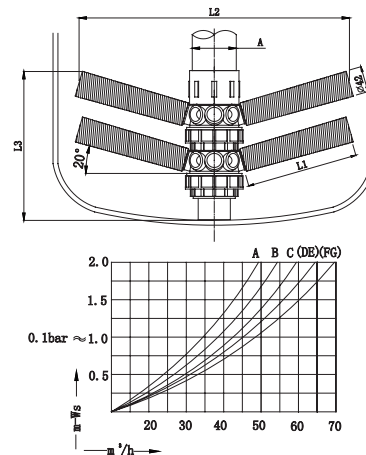

型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	绕丝管缝隙	罐体上开口
	A	L1	L2	L3	Inches (mm)	Flow	Slot (mm)	Top Opening
HU5669C-2	89/90	205	490	342	24" (600mm)	A	0.2/0.25/	6"FLG
HU5670C-2		268	615	352	30" (750mm)	B	0.3/0.35/	
HU5672C-2		300	690	357	36" (900mm)	C	0.4/0.45/	
HU5673C-2		363	810	367	42" (1000mm)	D	0.5/	
HU5674C-2		426	930	377	48" (1200mm)	E		
HU5675C-2		489	1050	387	60" (1500mm)	F	任意缝隙可选	
HU5676C-2		552	1170	407	63-80" (1600-2000mm)	G		

6" 法兰口侧装布水器/Side Mount Top Distributor



H173



H173N





无不锈钢螺钉，耐腐蚀
without SS screw

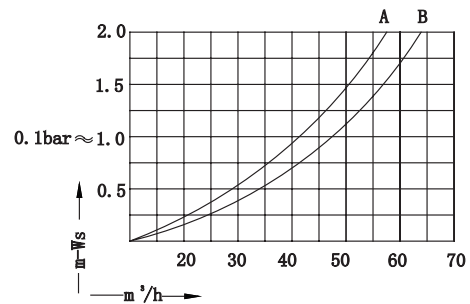

型号 Type	尺寸 Dimension(mm)			罐体尺寸 Tank Size Inches(mm)	流量 Flow	支管缝隙 Slot(mm)	罐体上开口 Top Opening
	A	L1	L2				
H173	89/90/110/114 3" NPT/3" BSPP 4" NPT/4" BSPP 4" UN	360	215	24"-48" (600-1200mm)	A	0.2/0.5	6" FLG
H173L		455	310	48"-80" (1200-2000mm)	B		
H173N		393	248	24"-48" (600-1200mm)	A		
H173NL		543	398	48"-80" (1200-2000mm)	B		



H176

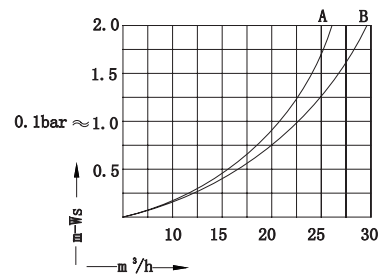

型号 Type	尺寸 Dimension(mm)			罐体尺寸 Tank Size Inches(mm)	流量 Flow	支管缝隙 Slot(mm)	罐体上开口 Top Opening
	A	L1	L2				
H176	89/90/110/114 3" NPT/3" BSPP 4" NPT/4" BSPP 4" UN	325	180	24"-48" (600-1200mm)	A	0.2	6" FLG
H176L-1		430	285	48"-63" (1200-1600mm)	B		

6" 法兰口侧装上布水器/Side Mount Top Distributor 3900阀用6" 法兰式上布水器/Top distributor for fleck 3900

HD5680

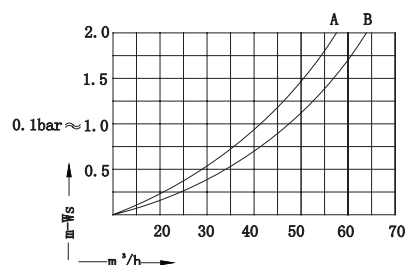



型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size Inches (mm)	流量 Flow	支管缝隙 Slot (mm)	罐体上开口 Top Opening
	A	L1	L2	L3				
HD5680	89/90/110 3"NPT/3"BSPP	180	550	295	36-48" (900-1200mm)	A	0.2	6"FLG
HD5680L	4"NPT/4"BSPP 4"UN				48-80" (1200-2000mm)	B		

备注： 流量加大, 法兰开口尺寸请选择4"
If large flow rate, you'd better choose 4" interface.



3900阀用6"法兰式上布水器 top distributor for Fleck 3900

H171

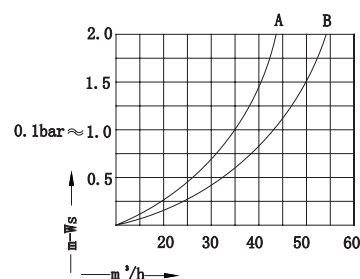
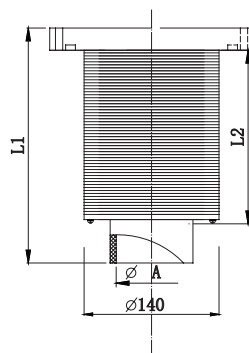


型号 (Type)	尺寸(Dimension) mm			流量 (Flow)	适用 罐 体 (Tank Size)	罐体开口 (Top Opening)
	A	L1	L2			
H171	90	290	220	A	36"-63"(900-1600mm)	6"FLG
H171L	90	510	440	B	63"-80"(1600-2000mm)	6"FLG

八爪/十六爪侧装下布水器/Side Mount Distributor 8/16 Laterals

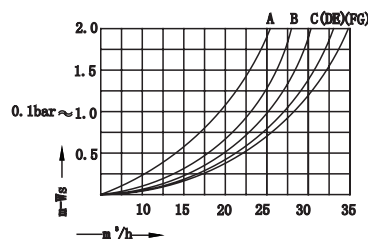

型号 Type	尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
	A	L1	L2	L3			
HD5669B2-1	89/90/110 /114 3" NPT/3" BSPT 4" NPT/4" BSPT 4" UN	205	490	320	24" (600mm)	A	6" FLG
HD5670B2-1		268	615	340	30" (750mm)	B	
HD5672B2-1		300	690	355	36" (900mm)	C	
HD5673B2-1		363	810	375	42" (1000mm)	D	
HD5674B2-1		426	930	395	48" (1200mm)	E	
HD5675B2-1		489	1050	415	60" (1500mm)	F	
HD5676B2-1		552	1170	430	63-80" (1600-2000mm)	G	




型号 Type	尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
	A	L1	L2	L3			
HD5669B2-2	89/90/110 /114 3" NPT/3" BSPT 4" NPT/4" BSPT 4" UN	205	490	450	24" (600mm)	A	6" FLG
HD5670B2-2		268	615	460	30" (750mm)	B	
HD5672B2-2		300	690	465	36" (900mm)	C	
HD5673B2-2		363	810	475	42" (1000mm)	D	
HD5674B2-2		426	930	485	48" (1200mm)	E	
HD5675B2-2		489	1050	495	60" (1500mm)	F	
HD5676B2-2		552	1170	510	63-80" (1600-2000mm)	G	


备注： 流量加大, 法兰开口尺寸请选择4"

If large flow rate, you'd better choose 4" interface.

大流量八爪/十六爪侧装下布水器/High Flow Side Mount Distributor 8/16 Laterals

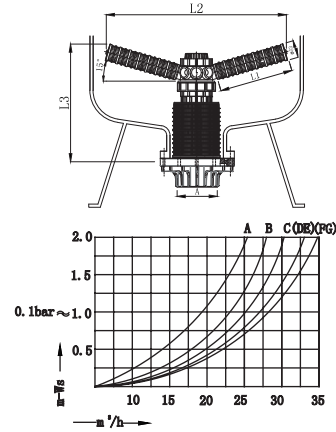

型号 Type	尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
	A	L1	L2	L3			
HD5669D2-1	89/90/110 /114 3" NPT/3" BSPT 4" NPT/4" BSPT 4" UN	205	490	320	24" (600mm)	A	6" FLG
HD5670D2-1		268	615	340	30" (750mm)	B	
HD5672D2-1		300	690	355	36" (900mm)	C	
HD5673D2-1		363	810	375	42" (1000mm)	D	
HD5674D2-1		426	930	395	48" (1200mm)	E	
HD5675D2-1		489	1050	415	60" (1500mm)	F	
HD5676D2-1		552	1170	430	63-80" (1600-2000mm)	G	

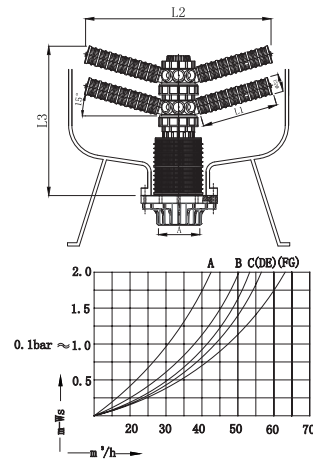


型号 Type	尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
	A	L1	L2	L3			
HD5669D2-2	89/90/110 /114 3" NPT/3" BSPT 4" NPT/4" BSPT 4" UN	205	490	450	24" (600mm)	A	6" FLG
HD5670D2-2		268	615	460	30" (750mm)	B	
HD5672D2-2		300	690	465	36" (900mm)	C	
HD5673D2-2		363	810	475	42" (1000mm)	D	
HD5674D2-2		426	930	485	48" (1200mm)	E	
HD5675D2-2		489	1050	495	60" (1500mm)	F	
HD5676D2-2		552	1170	510	63-80" (1600-2000mm)	G	


备注：流量加大，法兰开口尺寸请选择4"

If large flow rate, you'd better choose 4" interface.

大流量八爪/十六爪侧装下布水器/High Flow Side Mount Distributor 8/16 Laterals

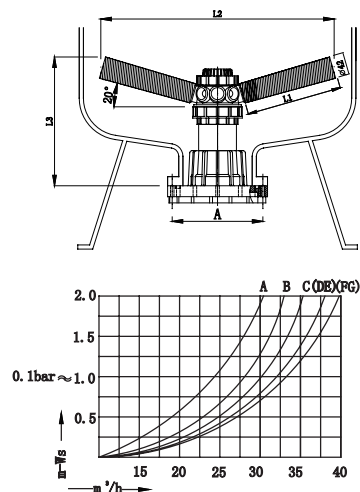

型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	绕丝管缝隙	罐体下开口
	A	L1	L2	L3	Inches (mm)	Flow	Slot (mm)	Bottom Opening
HD5669C-1	110 4" NPT/4" BSPT 4" UN	205	490	320	24" (600mm)	A	0.2/0.25/	6"FLG
HD5670C-1		268	615	340	30" (750mm)	B	0.3/0.35/	
HD5672C-1		300	690	355	36" (900mm)	C	0.4/0.45/	
HD5673C-1		363	810	375	42" (1000mm)	D	0.5/	
HD5674C-1		426	930	395	48" (1200mm)	E		
HD5675C-1		489	1050	415	60" (1500mm)	F	任意缝隙可选	
HD5676C-1		552	1170	430	63-80" (1600-2000mm)	G		

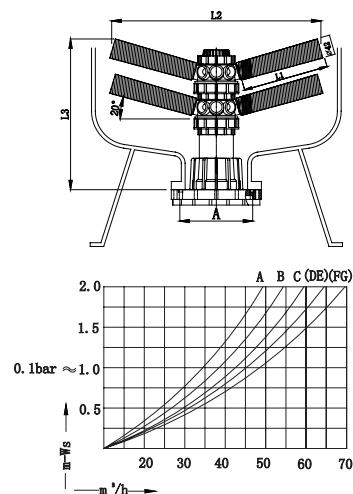


型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	绕丝管缝隙	罐体下开口
	A	L1	L2	L3	Inches (mm)	Flow	Slot (mm)	Bottom Opening
HD5669C-2	110 4" NPT/4" BSPT 4" UN	205	490	450	24" (600mm)	A	0.2/0.25/	6"FLG
HD5670C-2		268	615	460	30" (750mm)	B	0.3/0.35/	
HD5672C-2		300	690	465	36" (900mm)	C	0.4/0.45/	
HD5673C-2		363	810	475	42" (1000mm)	D	0.5/	
HD5674C-2		426	930	485	48" (1200mm)	E		
HD5675C-2		489	1050	495	60" (1500mm)	F	任意缝隙可选	
HD5676C-2		552	1170	510	63-80" (1600-2000mm)	G		


备注： 流量加大, 法兰开口尺寸请选择4"

If large flow rate, you'd better choose 4" interface.

6" 法兰口侧装上、下布水器/Side Mount Top & Bottom Distributor

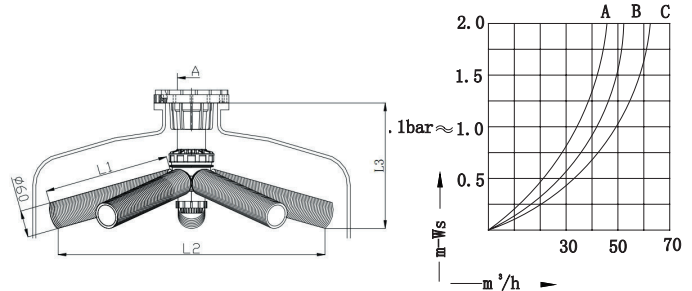

型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size Inches (mm)	流量 Flow	绕丝管缝隙 Slot (mm)	罐体上/下开口 Top/Bottom Opening
	A	L1	L2	L3				
HD5651-1	110 4" NPT/4" BSPT 4" UN	552	1170	500	60"-63"(1500-1600mm)	A	0.2/0.25/ 0.3/0.35/ 0.4/0.45/ 0.5/ 任意缝隙可选	6"FLG
HD5652-1		615	1290	515	72"-80"(1800-2000mm)	B		

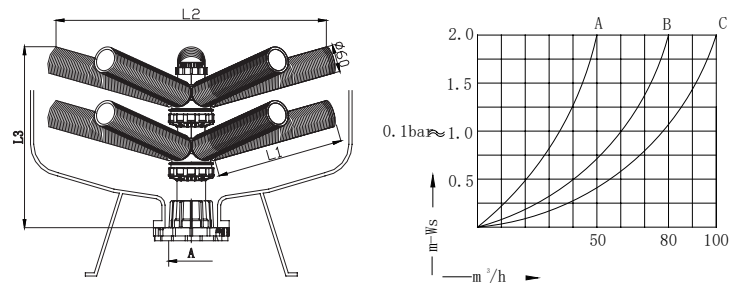

型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size Inches (mm)	流量 Flow	绕丝管缝隙 Slot (mm)	罐体下开口 Bottom Opening
	A	L1	L2	L3				
HD5651-2	110 4" NPT/4" BSPT 4" UN	552	1170	650	60"-63"(1500-1600mm)	A	0.2/0.25/ 0.3/0.35/ 0.4/0.45/ 0.5/ 任意缝隙可选	6"FLG
HD5652-2		615	1290	665	72"-80"(1800-2000mm)	B		

备注：流量加大，法兰开口尺寸请选择4"
If large flow rate, you'd better choose 4" interface.

黑二通系列/Tank Head Series 变径系列/Adaptor Series

黑二通系列 Tank Head Series


H9901



H9902



H9902-1

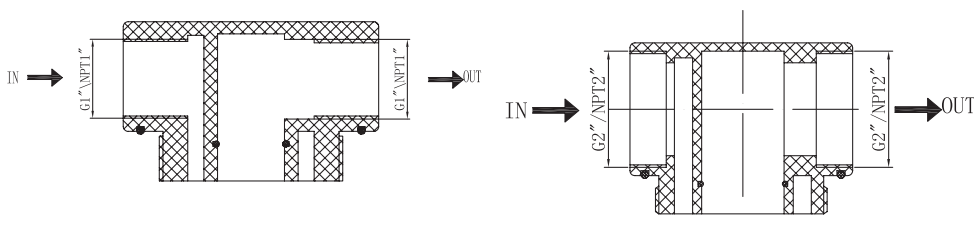

型号 (Type)	名称 (Name)	材质 (Material)	罐体开口 (Tank opening)	接口尺寸 (In/Out)	中心管径 (Center Riser)
H9901	2.5"黑二通 (2.5"tank head)	UPVC	2.5"-8NPSM	G1"/NPT1"/G $\frac{3}{4}$ "/NPT $\frac{3}{4}$ "	3/4"(27mm)/1"(33.4mm)
H9902	4"黑二通 (4"tank head)	UPVC	4"-8UN	G2"/NPT2"	1.5"(48.3/50 mm)
H9902-1	4.5" 黑二通及上下布水器 (4.5"tank head & distributor)	ABS	4.5"Buttress	NPT1"	1"(33.4mm)

变径系列 Adaptor Series

Type:H9903-A



Type:H9903-B



Type:H9904



Type:H9905



型号 (Type)	名称 (Name)	材质 (Material)	外螺纹 (Outer Thread)	内螺纹 (Inner Thread)
H9903-A	4"-2.5" 变径 (4-2.5"Adaptor)	ABS	4"-8UN	2.5"-8NPSM
H9903-B	4"-2.5"变径 (4-2.5"Adaptor)	ABS/PPO	4"-8UN	2.5"-8NPSM
H9904	6"-4" 变径 (6-4"Adaptor)	ABS/PPO	6"-8UN	4"-8UN
H9905	6"-4" 法兰变径 (6-4" FLG Adaptor)	PVC/PPO		4"-8UN 4"-8NPT

闷盖、法兰系列/Closure & Flange Series
 树脂捕捉器/Resign Trap

闷盖、法兰系列 Closure & Flange Series

H9914-A H9914-B H9913 H9910-H9912



型号 (Type)	名称 (Name)	材质 (Material)	外螺纹 (Outer Thread)
H9914 -A	4" 闷盖 (4"Closure)	ABS/PPO	4"-8UN
H9914 -B	4" 闷盖 (4"Closure)	ABS/PPO	4"-8UN
H9913	6" 法兰闷盖 (6" FLG Closure)	PVC/PPO	

型号(Type)	名称 (Name)	螺纹 A (Thread A)	螺纹 B (Thread B)	材质 (Material)
H9910	6" 法兰座	3"BSPP/3"NPT	89/90	PVC /PPO
H9911	6" 法兰座	3"BSPP/3"NPT	4" UN /4"NPT	PVC /PPO
H9912	6" 法兰座	3"BSPP/3"NPT	3"BSPP/3"NPT	PVC /PPO

树脂捕捉器 Resign Trap



Type (型号)	Connection (接口形式)
RT-1	2"or3 "glue(粘结)
RT-2	2" or 3" union (活结)
RT-3	2" or 3" flange (法兰)